

3 PHASE - 56C FRAME

HP: 1/3 - 3



Frame: 56C

RPM: 1800/3600

Pole: 2 & 4

Volt: 208-230/ 460V

Body: TC-Frame

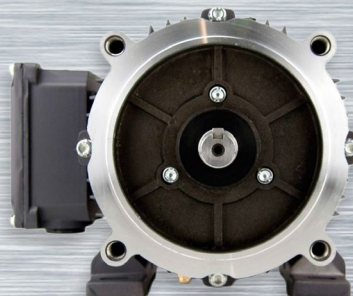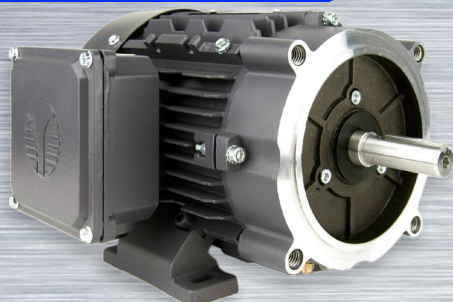

Standard Features:

- Inverter Rated - 4:1 Constant Torque
- IP 55 Protection Rated
- Multi mount Removable Feet
- 50/60 Hz Capable
- One-Way Brass Condensation Drain
- 1.15 Service Factor
- Conduit Box is 90° Rotatable
- Double Lip Oil Seals on DE & ODE
- Vacuum Impregnated Winding
- 9 Lead Dual Voltage
- Drive End Bearing Locks
- Class F Insulation System with Class H Stator
- F1, F2, F0 Field Convertible (Shipped F1)
- Designed to Class B Temperature Rise
- 24 Month Warranty



HP	Sync Speed	Model Number	List Price (USD)
1/3	3600	BL3-AL-TF-56C-2-B-D-.33	\$278
	1800	BL3-AL-TF-56C-4-B-D-.33	\$270
1/2	3600	BL3-AL-TF-56C-2-B-D-.5	\$293
	1800	BL3-AL-TF-56C-4-B-D-.5	\$285
3/4	3600	BL3-AL-TF-56C-2-B-D-.75	\$311
	1800	BL3-AL-TF-56C-4-B-D-.75	\$309
1	3600	BL3-AL-TF-56C-2-B-D-1	\$326
	1800	BL3-AL-TF-56C-4-B-D-1	\$349
1.5	3600	BL3-AL-TF-56C-2-B-D-1.5	\$341
	1800	BL3-AL-TF-56C-4-B-D-1.5	\$389
2	3600	BL3-AL-TF-56C-2-B-D-2	\$356
	1800	BL3-AL-TF-56C-4-B-D-2	\$429
3	3600	BL3-AL-TF-56C-2-B-D-3	\$433

